

MINI PERLA RGBW

with wall adapter niche not watertight

OC new




Cod. 2112835900L

LAMP WITH PVC FLANGE, DIFFUSER and 4m of CABLE

LED pool lamp with RGBW variable colour, ideal for small and medium pools. PLC controlled. For panel and reinforced concrete with tiles or pool liner. NICHE IS NOT INCLUDED.

Technical data:

Power supply	12 V AC
Current	1.8 A
Maximum real power consumption	22 W
Maximum apparent power consumption	28 VA
Electrical insulation class	III
Connections	4 m BLUE PBS-POOL CABLE 2X2.5
Maximum cable length	38 m
Area di copertura m ²	15 - 20
Beam angle	120°
Number of LEDs	12
LED color	RGBW
Total luminous flux	1130 lumen
Body made of	AISI316L STEEL AND GLASS
Weight	1.2 kg
Ingress Protection rating	IP67
Working conditions	EXCLUSIVELY IN WATER
Maximum ambient temperature	(water) 40 °C
Control signal	POWER LINE COMUNICATION
Nr of programmed colors	13
Nr of programmed sequences	10

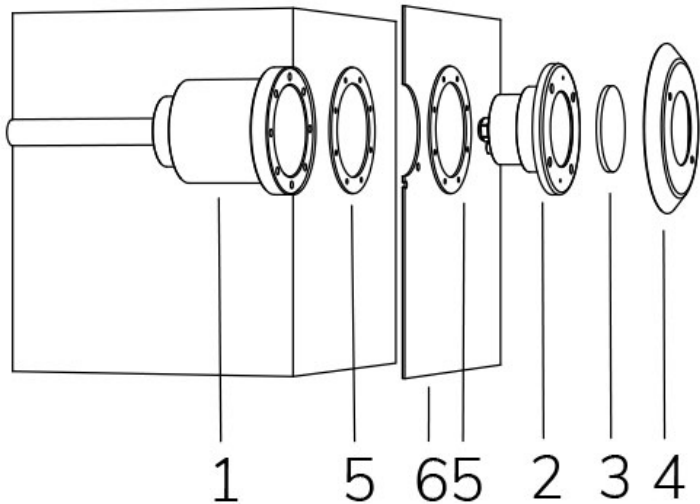

- 1 NICHE
- 2 LAMP
- 3 OPTICAL DIFFUSER
- 4 FRONT FLANGE
- 5 GASKET
- 6 POOL LINER

23/07/20 - All specifications included in this document, in the interest of continuous product improvement and to correct any error, can be changed without notice.

MINI PERLA RGBW


with wall adapter niche not watertight



Cod. 2112835900L

LAMP WITH PVC FLANGE, DIFFUSER and 4m of CABLE

LED pool lamp with RGBW variable colour, ideal for small and medium pools. PLC controlled. For panel and reinforced concrete with tiles or pool liner. NICHE IS NOT INCLUDED.

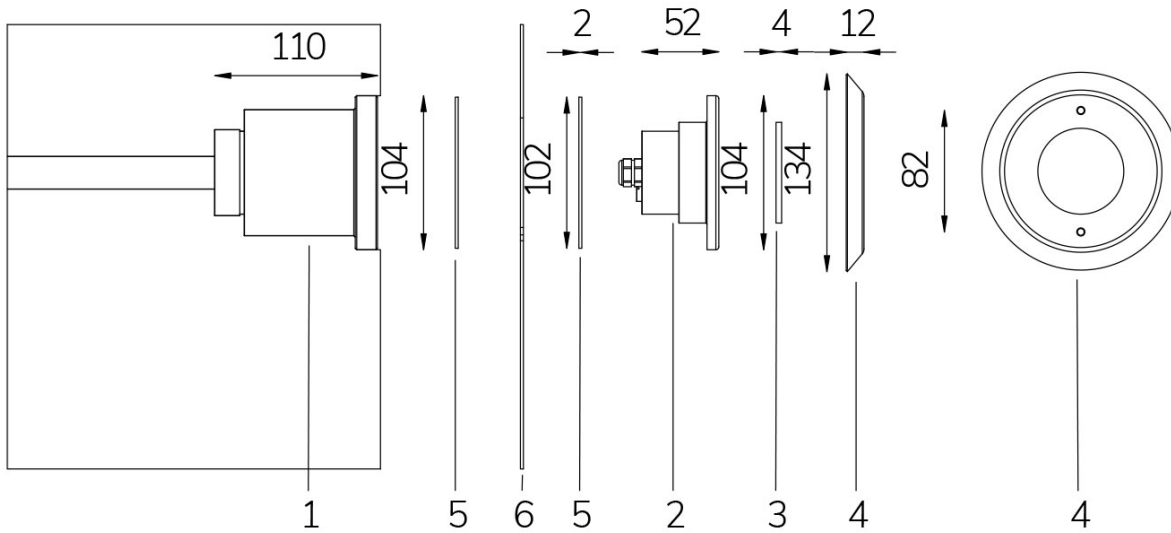

23/07/20 - All specifications included in this document, in the interest of continuous product improvement and to correct any error, can be changed without notice.